

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_


TYPE: \_\_\_\_\_



**LP-2X4-72W-50K-DS**  
**LP-2X4-72W-40K-DS**  
**LP-2X4-72W-35K-DS**  
**LP-2X4-72W-27K-DS**

**DIMENSIONS:**

47.75"(L) x 23.75"(H) x 1.71"(D)

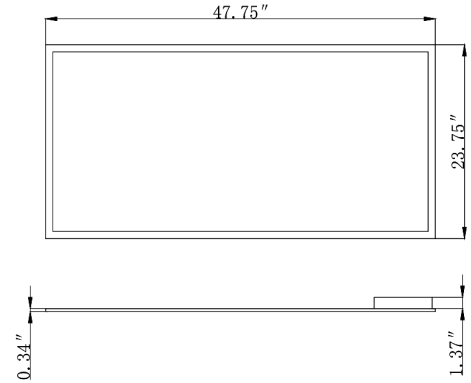

47.75" x 23.75" x 1.71"

**LED PANEL LIGHTS (2X4) 72W**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100-277VAC, 50/60Hz
- Wattage: 72W
- Current: 1500mA
- Power factor: >0.90
- Efficacy: 110LM/W, 105LM/W, 90LM/W
- THD: <15%

**HOUSING SPECIFICATIONS:**

- External driver mounted on top
- Earthquake hooks and suspension hooks pre-installed
- Operating temperature: -68°F ~ 104°F
- Lifespan: 50,000 Hrs.

**CERTIFICATIONS: FC, UL, DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LP-2X4-72W-50K-DS	72W	100~277VAC	7920LM	5000K
LP-2X4-72W-40K-DS	72W	100~277VAC	7920LM	4000K
LP-2X4-72W-35K-DS	72W	100~277VAC	7560LM	3500K
LP-2X4-72W-27K-DS	72W	100~277VAC	6480LM	2700K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- LED type: 2835SMD LM80
- No. of LED: 384
- Total lumens: 7920LM/7560LM/6480LM
- Color temperature: 5000K/4000K/3500K/3000K/2700K
- Color rendering index: >80
- Soft and wide light emitting
- No infrared rays, no ultraviolet radiation, no thermal effect
- No flickering, no humming, no RF interference

**WARRANTY: 5 years**

