

# LPNG-2X4

B3



### TECHNICAL SPECIFICATIONS:


- :: External driver mounted on top
- :: PMMA Light Guided Panel (LGP) does not turn yellow.
- :: High efficiency: 110LM/W
- :: Input Voltage: AC100V-277V
- :: Fixture Operating Voltage: 36VDC
- :: LED Type: 4014SMD (60W) / 2835SMD (72W) LM80
- :: Color Rendering Index: Ra>80
- :: Dimmable: 0~10V dimming
- :: Power Factor: >0.9
- :: Current (mA): 1500mA (60W) / 1850mA (72W) 36V DC
- :: Frequency Range: 50Hz~60Hz
- :: Total harmonic distortion: ≤15 %
- :: Operating temperature: 68°F~104°F
- :: Rated life: 50,000 hrs.
- :: 5-year warranty

### FEATURES:

- :: Soft and wide light emitting
- :: No infrared rays, no ultraviolet radiation, no thermal effect
- :: No flickering, no humming, no RF interference
- :: Earthquake hooks and Suspension hooks preinstalled

**OPTIONS**

- DAYLIGHT HARVESTING
- MOTION SENSOR
- BATTERY BACKUP

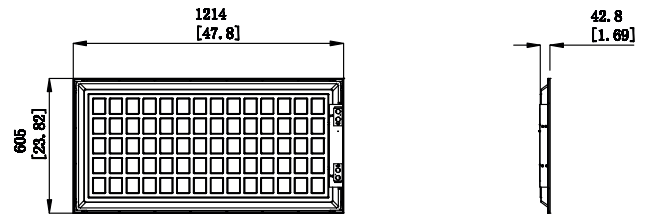

## LED BACKLIT PANEL LIGHTS (2X4)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
LPNG-2X4-5KLM-50K-D	50W	5250LM	5000K	47.8" x 23.82" x 1.69"
LPNG-2X4-5KLM-40K-D	50W	5250LM	4000K	
LPNG-2X4-5KLM-35K-D	50W	5250LM	3500K	
LPNG-2X4-5KLM-27K-D	50W	5250LM	2700K	
LPNG-2X4-6KLM-50K-D	60W	6300LM	5000K	
LPNG-2X4-6KLM-40K-D	60W	6300LM	4000K	
LPNG-2X4-6KLM-35K-D	60W	6300LM	3500K	
LPNG-2X4-6KLM-27K-D	60W	6300LM	2700K	
LPNG-2X4-7KLM-50K-D	60W	7200LM	5000K	
LPNG-2X4-7KLM-40K-D	60W	7200LM	4000K	
LPNG-2X4-7KLM-35K-D	60W	7200LM	3500K	
LPNG-2X4-7KLM-27K-D	60W	7200LM	2700K	