



JOB NAME: _____

DATE: _____


TYPE: _____

DIMENSIONS:

FITS: STANDARD SINGLE-GANG JUNCTION BOX



Includes PVC Gasket Set for mounting to J-Box / Weatherproof Box

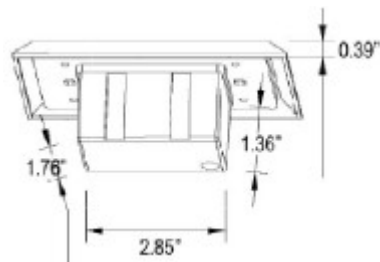

SLE-120V-50K
SLE-120V-30K



120V STEP LIGHT ENGINES

Ideal for recessed step lighting, walkway and path lighting, courtyard lighting and deck lighting. Optional face plates sold separately.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120V AC
- Wattage: 3W
- Efficacy: 30lm/W~35lm/W

HOUSING SPECIFICATIONS:

- Black polycarbonate housing
- Frosted inside of glass lens
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations

CERTIFICATIONS: ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SLE-120V-50K	3W	120V AC	104lm	5000K
SLE-120V-30K	3W	120V AC	90lm	3000K

LIGHTING SPECIFICATIONS:

- LED type: Integrated SMD LED Module
- Total lumens: 90lm and 104lm
- Color temperature: 3000K / 5000K
- Beam angle: 120°

WARRANTY: 5 years

INSTALLATION:

- Simply installs in single-gang J-Box or Weatherproof Box



SLE-120V-50K

SLE-120V-30K

120V STEP LIGHT ENGINES

FACE PLATES: Precision Cast Aluminum

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
SLE-120V-50K	3W	120V AC	104lm	5000K
SLE-120V-30K	3W	120V AC	90lm	3000K

**ORB—OIL RUBBED
BRONZE FINISH**

**BN—BRUSHED
NICKEL FINISH**

WH—WHITE FINISH

**AZ—ANTIQUE
BRONZE FINISH**

**HORIZONTAL
LOUVER**



CAT. NO. SLT-LH-ORB



CAT. NO. SLT-LH-BN



CAT. NO. SLT-LH-WH



CAT. NO. SLT-LH-AZ


FLAT



CAT. NO. SLT-F-ORB



CAT. NO. SLT-F-BN



CAT. NO. SLT-F-WH



CAT. NO. SLT-F-AZ

SCOOP



CAT. NO. SLT-S-ORB



CAT. NO. SLT-S-BN



CAT. NO. SLT-S-WH



CAT. NO. SLT-S-AZ

**VERTICAL
LOUVER**



CAT. NO. SLT-LV-ORB



CAT. NO. SLT-LV-BN



CAT. NO. SLT-LV-WH



CAT. NO. SLT-LV-AZ

