


SCLL-UD

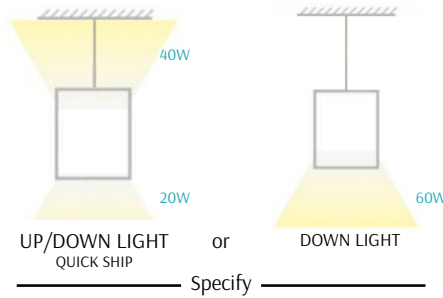


TECHNICAL SPECIFICATIONS:

- :: 4 Feet long
- :: White Finish
- :: Voltage: 120-277VAC 50/60Hz
- :: Wattage: Up/Down: 40W/20W or 60W Down only
- :: Ambient Temperature: -13°F~104°F
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Efficacy: 110LM/W
- :: IP Rating: IP20
- :: Life Span: 50,000 hours
- :: Housing: Anodized Aluminum
- :: 5-year warranty


OPTIONS

- DAYLIGHT HARVESTING
- MOTION SENSOR
- BATTERY BACKUP

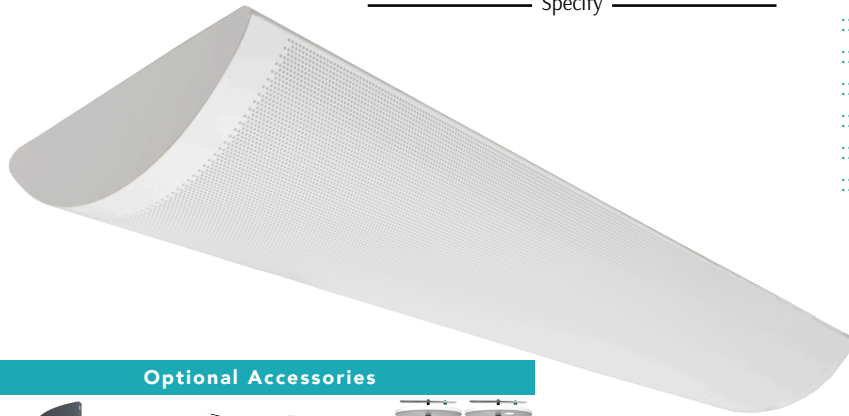


Optional Accessories


Coupling Bracket
(Not Included)
See Below


6 Ft. Cord
SJTW 18 AWG 5-Conductor
(Not Included)
See Page B37


Adjustable 6 Ft.
Suspension Kit
Select a Y-Connector
Key Hole Set
(Not Included)
See Page B37

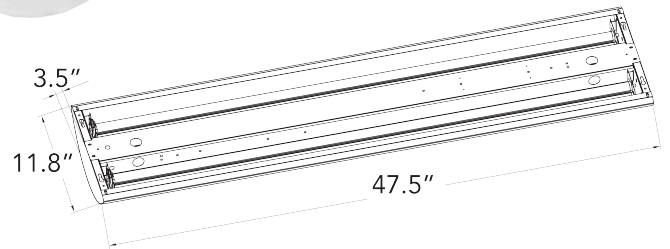

LED PERFORATED BASKET SUSPENDED LIGHTS (UP/DOWN)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
SCLL-UD-4FT-60W-50K-D	40W/20W or 60W	4400LM/2100LM	5000K	47.3"(L) x 9-2/8"(W) x 2-4/8"(H)
SCLL-UD-4FT-60W-40K-D	40W/20W or 60W	4400LM/2100LM	4000K	
SCLL-UD-4FT-60W-35K-D	40W/20W or 60W	4400LM/2100LM	3500K	
SCLL-UD-CB	Coupling Bracket			

WCLP-UD MULTI COLOR TEMPERATURE



LED LOUVER WALL LIGHTS (UP/DOWN)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
WCLP-UD-2FT-25W-MCT-D	25W	2750LM	3000K/4000K/5000K	2 FT.
WCLP-UD-4FT-50W-MCT-D	50W	5500LM	3000K/4000K/5000K	4FT.

B17