

JOB NAME: _____

DATE: _____

TYPE: _____



HPL-32W-50K-E26
HPL-32W-30K-E26

LED HIGH POWER LAMPS

Ideal for retrofitting existing HID high bay, it can be used in enclosed luminaires

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 32W
- Power factor: >0.90
- Efficacy: 125LM/W
- THD: 25%

HOUSING SPECIFICATIONS:


- Plastic Housing
- No fan housing (New Technology)
- Lamp base: E26 Mogul Base
- Operating temperature: -4°F ~ 122°F
- Lifespan: 50,000 hrs.
- IP rating: suitable for damp location

CERTIFICATIONS: UL



DIMENSIONS:

8.26"(H) x 4.65"(D)

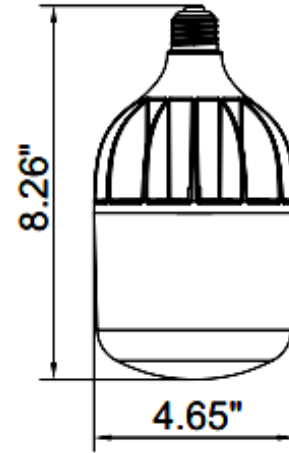

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|-----------------|-------|------------|--------|------------|
| HPL-32W-50K-E39 | 32W | 120~277VAC | 4000LM | 5000K |
| HPL-32W-30K-E39 | 32W | 120~277VAC | 4000LM | 3000K |

LIGHTING SPECIFICATIONS:

- Lens: PC Lens
- Total lumens: 4000LM
- Color temperature: 5000K/3000K
- Color rendering index: >80
- Beam Angle: 200°

WARRANTY: 5 years

