

LTR

TECHNICAL SPECIFICATIONS:


- :: Input Voltage: AC100V~277V, 50/60Hz
- :: Power Factor: 0.97
- :: High efficiency: 110LM/W
- :: CRI: >80
- :: Dimmable: 0~10V dimming
- :: IP rating: IP20 (Indoor)
- :: Ambient temperature: -20°F~105°F
- :: Rated life: 50,000 hrs.

FEATURES:

- :: New modern look wide PC lens
- :: Exclusive design lens installs from opening on ends to prevent leakage of light
- :: Modern matt white finish
- :: Earthquake hooks built-in to housing

APPLICATIONS:


- :: Ideal one-for-one replacement of conventional fluorescent troffer fixtures

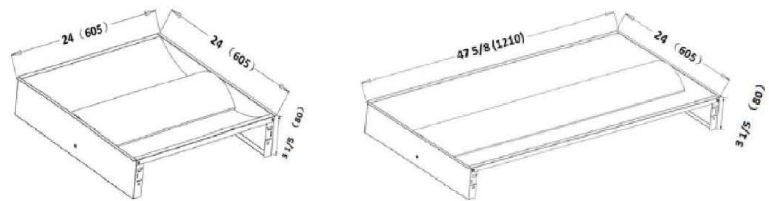

LED CENTER BASKET (PC LENS) TROFFER LIGHTS

CATALOG NO.	SIZES	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
LTR-2X2-40W-50K-D	2X2	40W	4417LM	3500K	24" x 24" x 3-1/8"
LTR-2X2-40W-40K-D	2X2	40W	4281LM	4000K	24" x 24" x 3-1/8"
LTR-2X2-40W-35K-D	2X2	40W	4281LM	5000K	24" x 24" x 3-1/8"
LTR-2x4-50W-50K-D	2X4	50W	5590LM	3500K	24" x 48" x 3-1/5"
LTR-2X4-50W-40K-D	2X4	50W	5590LM	4000K	24" x 48" x 3-1/5"
LTR-2X4-50W-35K-D	2X4	50W	5702LM	5000K	24" x 48" x 3-1/5"

ACCESSORIES

CATALOG NO.	DESCRIPTION
 ELB-1248-EXTR	Field-installed emergency ballast; Input voltage: 100~277V AC, 50~60Hz; Input current: 65mA (max); Input power: 4.8W (max); Output voltage: 12V~48V DC; Output power: 12W (max); Emergency operation: >90 mins.; Recharge: 24 hrs.

