


UC-24V

Ideal for granite counter tops



UC-24V SERIES

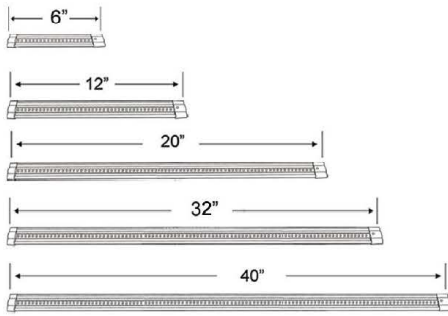

1-1/4" width x 1/4" height x Length

24V

TECHNICAL SPECIFICATIONS:

- :: Requires electronic or hard wired magnetic drivers
- :: Ultra-low profile—only 1/4" deep
- :: Extruded aluminum housing with white powder coat finish
- :: Polycarbonate end caps with universal feed thru mono-pin receptacle
- :: Acrylic lens (.125" thickness).
- :: Highly efficient SMD 3528 chip technology
- :: Integral switch, push on—push off
- :: Mounting hardware and coupler included
- :: Working voltage: 24V DC—driver required
- :: Plug in electronic or hard wired magnetic drivers available
- :: Suitable for interior applications only
- :: Ambient temperature rating: -20°C (4°F) to +40°C (104°F)

FEATURES:

- :: Very low profile, easy to install, cool to the touch
- :: High brightness with excellent color rendition and years of maintenance free operation
- :: Wide selection of mounting hardware, accessories and LED drivers

ACCESSORIES INCLUDED



24-VOLT LED UNDERCABINET

CATALOG NO.	LENGTH	COLOR TEMP	WATTS	LUMENS	LED QTY
UC6WW	6"	3000K	2W	140LM	24
UC6W	6"	6000K	2W	168LM	24
UC12WW	12"	3000K	3W	250LM	42
UC12W	12"	6000K	3W	280LM	42
UC20WW	20"	3000K	5W	420LM	72
UC20W	20"	6000K	5W	462LM	72
UC32WW	32"	3000K	8W	590LM	96
UC32W	32"	6000K	8W	640LM	96
UC40WW	40"	3000K	11W	820LM	144
UC40W	40"	6000K	11W	880LM	144

