


**KERRING™**

# FP3073\*\*

## 32" Ceiling Fan

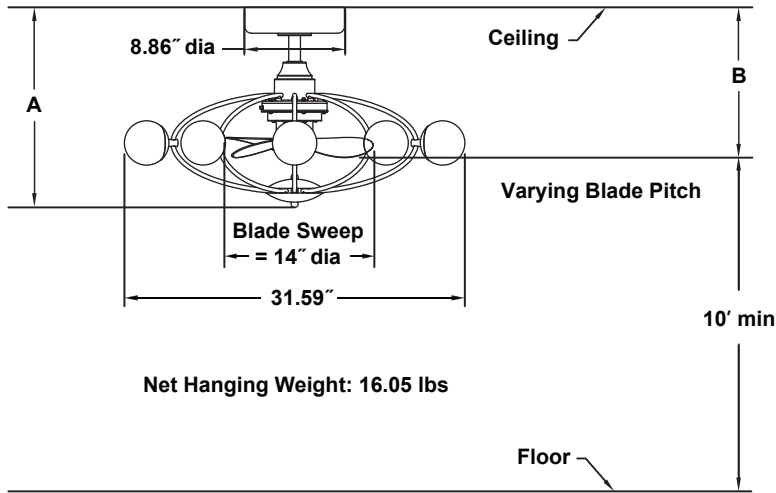

|                    | A      | B      |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 17.85" | 13.43" |
| Fan w/12" downrod  | 25.35" | 20.93" |
| Fan w/18" downrod  | 31.35" | 26.93" |
| Fan w/24" downrod  | 37.35" | 32.93" |
| Fan w/36" downrod  | 49.35" | 44.93" |
| Fan w/48" downrod  | 61.35" | 56.93" |
| Fan w/60" downrod  | 73.35" | 68.93" |
| Fan w/72" downrod  | 85.35" | 80.93" |

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

79.5 x 64 AC motor is designed for optimal performance with this fan.

### CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WR501WH wall control, BTCR9 hand held remote control, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Ten 3.8-watt dimmable LED included.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 20°. Most sloped ceiling installations require a standard 4.5" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 100 sq ft.

### Available Finishes

|    |                                      |
|----|--------------------------------------|
| BS | Brushed Satin Brass with Clear Blade |
| CH | Chrome with Clear Blade              |

### Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High      | 1201    | 1474 | 41          | 0.30 | 36    |
| Med       | 936     | 1106 | 44          | 0.26 | 25    |
| Low       | 633     | 767  | 52          | 0.21 | 15    |

### Energy Guide FTC

| Power (W <sub>ave</sub> ) | Total Air Delivery (CFM <sub>ave</sub> ) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 28                        | 1143                                     | 8                                 | 41                             |

### Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED       | 3.8   | 10  | 3200          | 3000       | 90% |