


JOB NAME: _____

DATE: _____

TYPE: _____



DIMENSIONS:

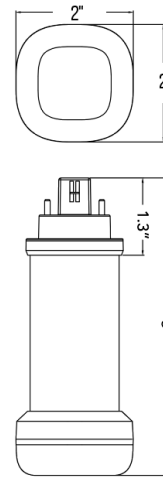

LPL-MB-14W-V-40K

LED LP LAMPS

Ideal for New as well as old residential and commercial constructions.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120~277V
- Wattage: 12W
- Power factor: >0.90
- Efficacy: 100LM/W

HOUSING SPECIFICATIONS:

- Vertical Directional lighting
- Replace with PL18 Fluorescent Lamp
- Operating temperature: -4°F ~ 113°F
- Lifespan: 50,000 Hrs.

CERTIFICATIONS: ETL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LPL-MB-14W-V-40K	12W	120~277V	1200LM	4000K

LIGHTING SPECIFICATIONS:

- Dimming: Non-dimmable
- Magnetic Ballast or AC (Ballast override)
- Base: G24q-2/G24q-3/GX24q-2/GX24q-3
- Total lumens: 1200LM
- Color temperature: 4000K
- Color rendering index: >80
- Beam Angle: 150°

WARRANTY: 5 years



LPL-MB-14W-H-L-40K

LED LP LAMPS

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LPL-MB-14W-H-L-40K	12W	120~277V	1200LM	4000K

LPL BALLAST COMPATIBILITY:

1200LM 4-pin LPL Ballast Compatibility List

No.	Ballast Description					1 lamp		2 lamp	
	Ballast Brand	Part Number	Voltage	# of Lamps	Lamp Connection	120	277	120	277
						compatible	compatible	compatible	compatible
1	Philips	ICF-2S18-H1-LD	120-277	2	Parallel	compatible	compatible	compatible	compatible
2	Philips	ICF-2S26-H1-LD	120-277	2	Parallel	compatible	compatible	compatible	compatible
3	Philips	ICF-2S42-M2-LD	120-277	2	Parallel	compatible	compatible	compatible	compatible
4	Philips	REZ-1Q18-M2-BS	120	1	n.a	compatible	compatible	not tested	not tested
6	Triad	Triad C213UNVME	120-277	2	Parallel	compatible	compatible	compatible	compatible
7	Triad	Triad C218UNVME	120-277	2	Parallel	compatible	compatible	compatible	compatible
8	Triad	Triad C2642UNVME	120-277	2	Parallel	compatible	compatible	compatible	compatible
9	Osram	QTP 2*26CF/UNV DM	120-277	2	Parallel	compatible	compatible	compatible	compatible
10	Hatch Lighting	HC226PS/UV/D	120-277	2	Parallel	compatible	compatible	compatible	compatible
12	Energy Savings	ES-2/1-CFQ-18-UNV-C	120-277	2	Parallel	compatible	compatible	compatible	compatible
14	Robertson	PSM 226CQMVDWCE(3P20145)	120-277	2	Parallel	compatible	compatible	compatible	compatible
15	Howard	EP2/26CF/MV/2	120-277	2	Parallel	compatible	compatible	compatible	compatible
16	Howard	EP2/42CF/MV/2	120-277	2	Parallel	compatible	compatible	compatible	compatible
17	Sola	E-724-U-226-MI-S	120-277	2	Parallel	compatible	compatible	compatible	compatible
18	Keystone	CAT.NO.KTEB-213-UV-RS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
19	Keystone	CAT.NO.KTEB-213-UV-PS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
20	Keystone	CAT.NO.KTEB-218-UV-RS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
21	Keystone	CAT.NO.KTEB-218-UV-PS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
22	Keystone	CAT.NO.KTEB-226-UV-RS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
25	Keystone	CAT.NO.KTEB-226-UV-PS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
26	Keystone	CAT.NO.KTEB-242-UV-RS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible
27	Keystone	CAT.NO.KTEB-242-UV-PS-DW	120-277	2	Parallel	un-compatible	un-compatible	compatible	compatible

